

# Green Street Rehabilitation

Public Informational Meeting

January 13, 2022



Lee Leiner, PE  
Bath Public Works Director  
Jan Wiegman, PE



1

## Presentation Overview

- Project Overview
- Utility Improvements
- Storm Drain Separation
- Roadway/Sidewalk Improvements
- Project Schedule
- Thank You



2

2

## Project Overview



### Utility Improvements

- New Sewer 500' on West and 300' on east ends of Green St
- Separate Storm Drain From Green to Bedford St
- Water Line Replacement
- Minor Utility Pole Relocations



### Roadway

- Reclaim existing road surface
- 26' wide road surface
- Concrete curb
- Parking along one side
- Preble Street rehab




### Sidewalk

- 5' wide sidewalk
- Both sides of road
- Curbs
- Crosswalks

3

## Utility Improvements

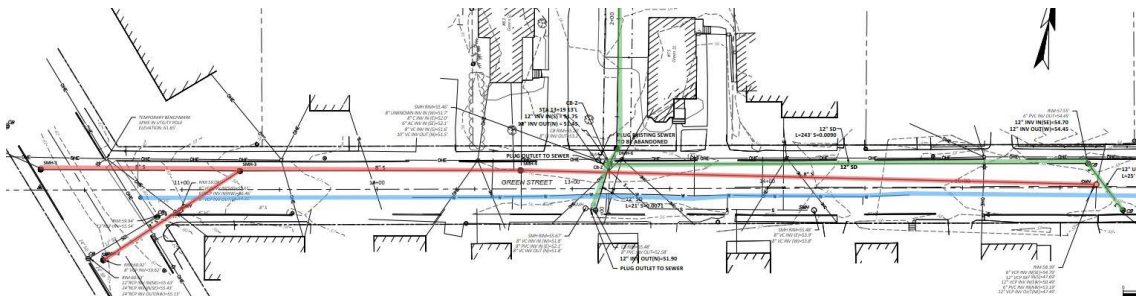


- New Sewer 500' West and 300' East Ends
  - Sewer services will be replaced
  - Allows for separation of sewer
- Water Line Replacement
  - New services to the ROW
- Some Minor Pole Relocations

4

## Utility Improvements

### Alignment of Storm Drain

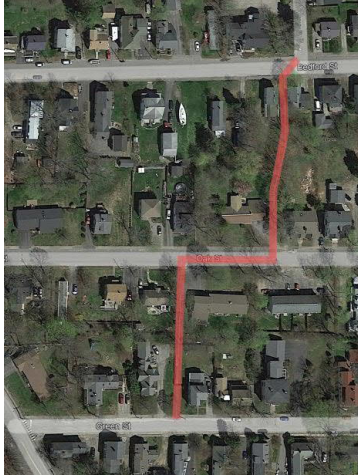


### Description

- New storm drain between Bedford and Green Street
  - Removes Storm water from the sewer system
  - Connects to Separated Storm Drain at Keel Street
  - Allows for separation of four CB on Green Street and additional CBs on Oak and Bedford

5

## Sewer Re-Lining

### Storm Drain Plans

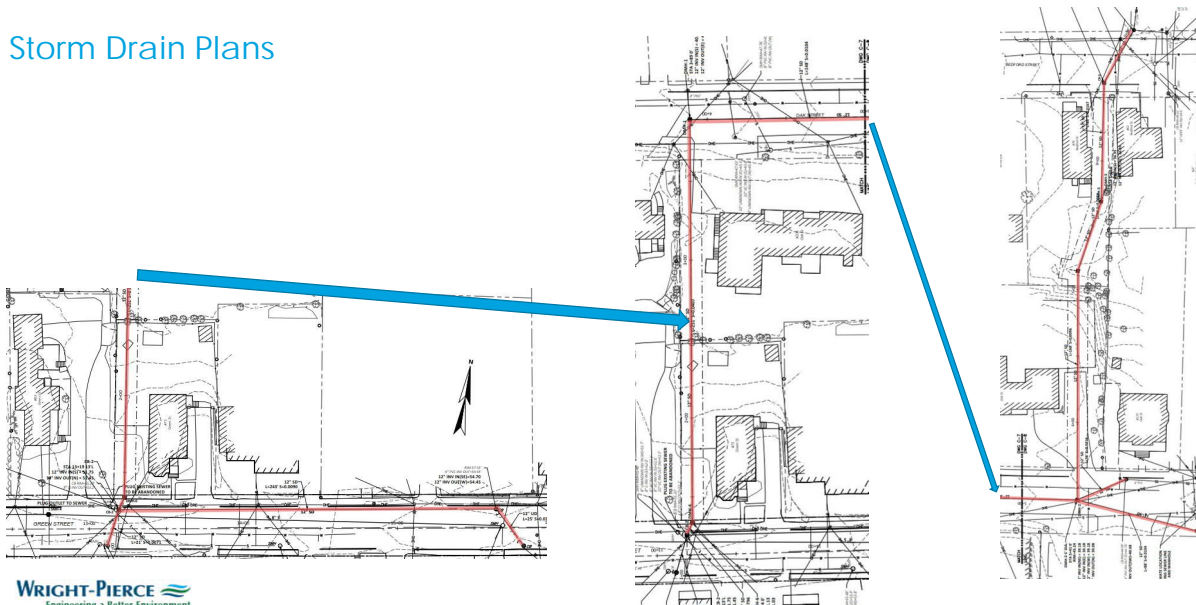

6

## Green Street Roadway

### Project Existing

- Existing Roadway
  - Surface in poor condition
  - Road width varies Approx 27'-28'
  - Little curb reveal and various curb types
  - Narrow Sidewalks on both sides
  - 40' Wide ROW
  - Parking is allowed
  - Utility Poles in roadway



7


## Green Street Roadway



**GREEN STREET**


8

## Green Street Roadway

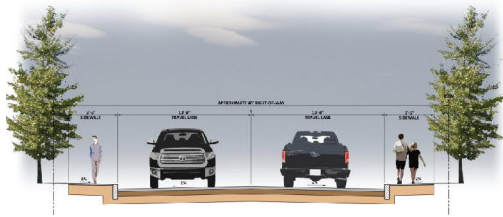

### Road Cross Section

- Two 13' wide travel lanes
- Two 5' Wide Sidewalks
- Total Width 37 feet

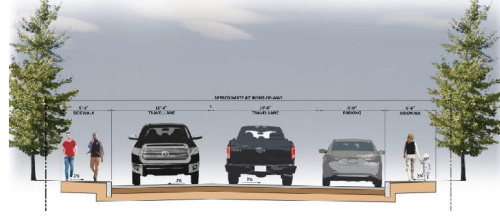

### Road Cross Section with Parking

- Two 10' wide travel lanes
- One 6' wide parking space
- Two 5' Wide Sidewalks

9

## Green Street Roadway

### Other Design Considerations

- Grading at ROW line
- Retaining walls
- Fences
- Existing granite curbs
- Trees along street



10

## Green Street Roadway



Sidewalk Grading



Utility Poles and Walls

## Project Schedule



- Project is being designed now
- Anticipated Bidding in Spring 2022
- Contractor to start in the Summer 2022

# THANK YOU

---